





Welcome to Sunglare Vitrified Pvt. Ltd.

Where you can find the ingenious sharp vision, global network and powerful backbone. First established company in 2001. After achieving success, we introduced SUNGLARE VITRIFIED.

The Glorious & fascinating world of Vitrified tiles created by "SUNGLARE", Rejuvenate your senses with our mesmerizing range of Vitrified tiles having stunning designs & vibrant as well as cool shades suiting your temperament.

Rest be assured about quality also while choosing from this wonderful collection. Taking the advantage of the latest technology, we have been able to create a combination of Beauty & Quality. This makes a path of harmony...









Glorious Finish

Elevate your space with our 600x600mm double charge tiles, seamlessly combining exciting designs and enduring durability. Perfect even for high-traffic areas or any place, these tiles offer timeless elegance, ensuring your interiors stay stylish and resilient for years to come.



600x600mm

(−−− 8mm

Prodcut Features



FROST RESISTANCE



RESISTANCE TO FIRE



WATERPROOF SURFACE



FLEXURAL STRENGTH



CHEMICAL RESISTANCE



LIGHT WEIGHT



WEAR RESISTANCE



HYGIENIC SURFACE



SCRATCH RESISTANCE



ECO FRIENDLY



STAIN RESISTANCE



DIMENSIONAL STABILITY



IMPERIL SERIES




ROYAL SERIES



PLAIN SERIES RUBY SERIES





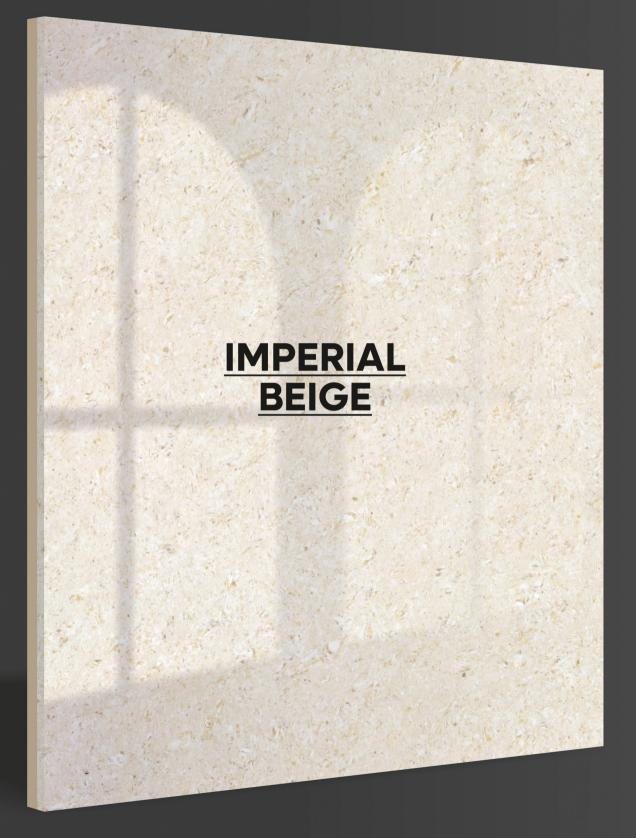

Thickness 8mm <u>Finish</u> **Polished**











FROST RESISTANCE RESISTANCE TO FIRE



WATERPROOF SURFACE


















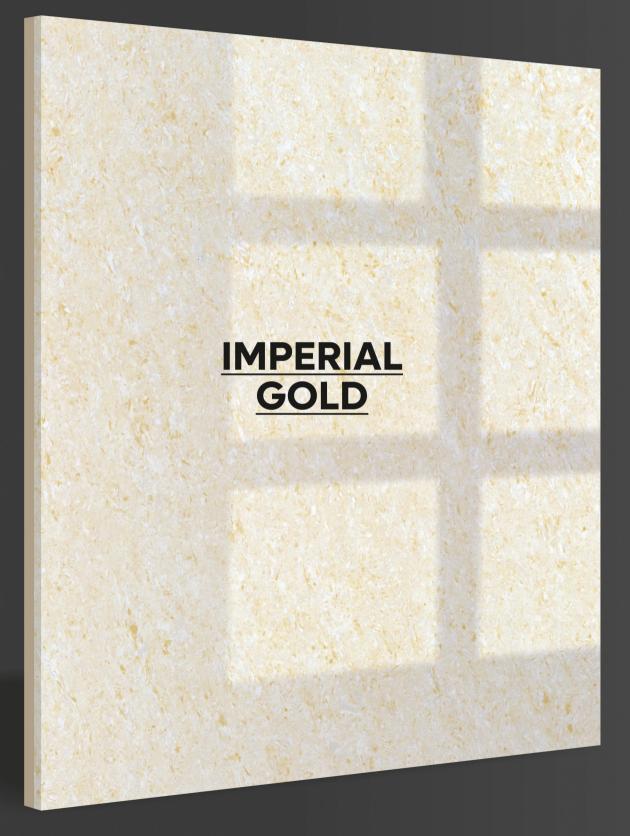

Thickness 8mm





業







FROST RESISTANCE RESISTANCE TO FIRE



WATERPROOF SURFACE










FLEXURAL STRENGTH

CHEMICAL RESISTANCE







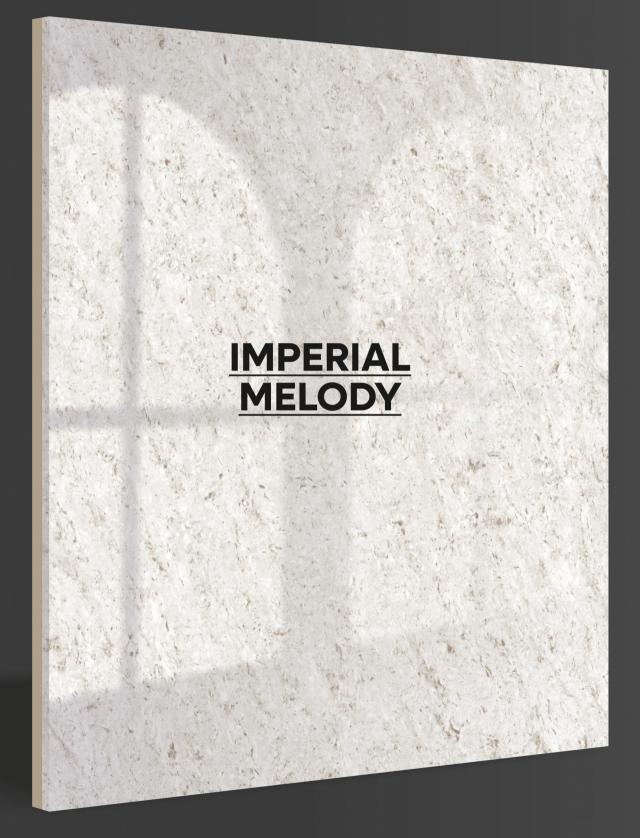

Thickness 8mm





業







FROST RESISTANCE RESISTANCE TO FIRE




















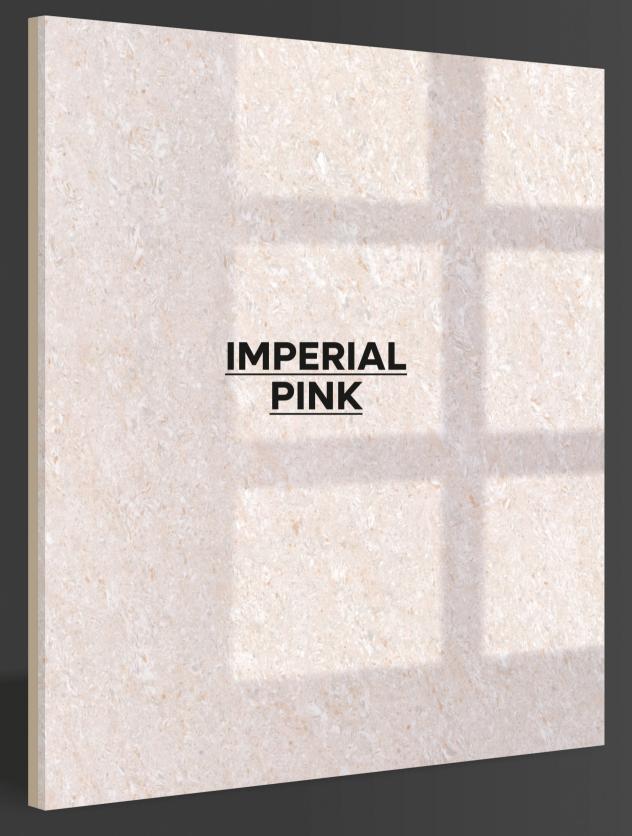

Thickness 8mm









FROST RESISTANCE
























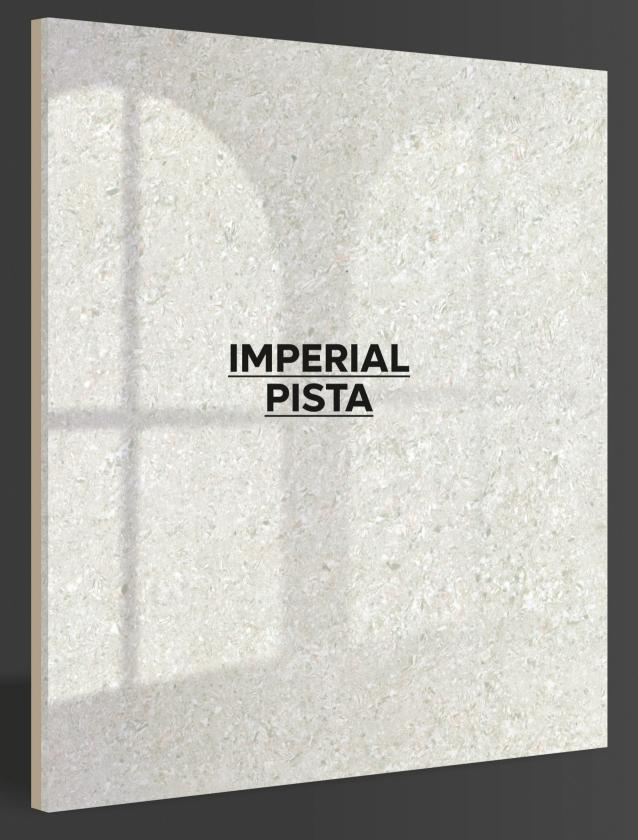

Thickness 8mm













FROST RESISTANCE RESISTANCE TO FIRE



WATERPROOF SURFACE


















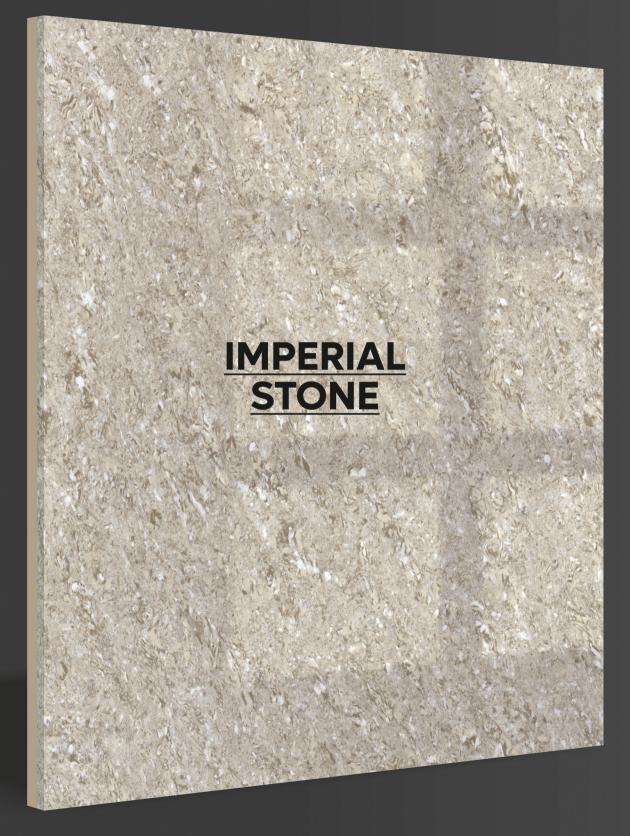

Thickness 8mm <u>Finish</u> **Polished**











FROST RESISTANCE RESISTANCE TO FIRE




FLEXURAL STRENGTH









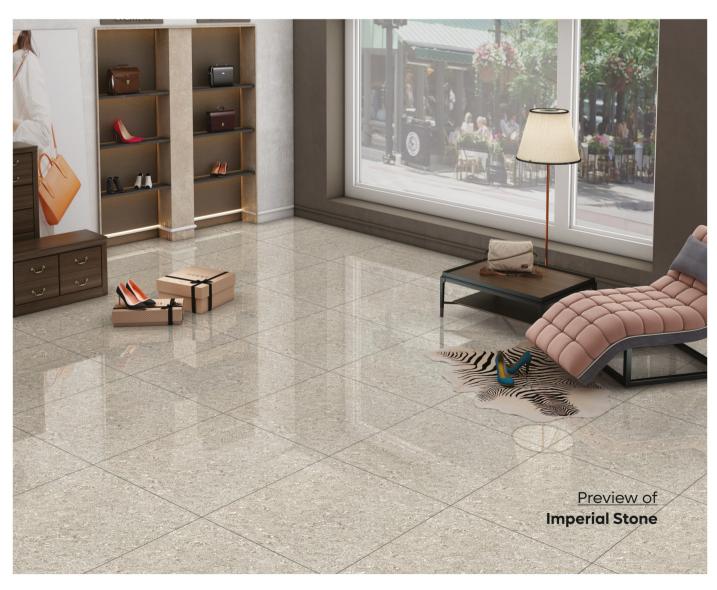



IMPERIAL WHITE

<u>Size</u> **600x600mm** Thickness 8mm









FROST RESISTANCE

RESISTANCE TO FIRE



WATERPROOF SURFACE







FLEXURAL STRENGTH












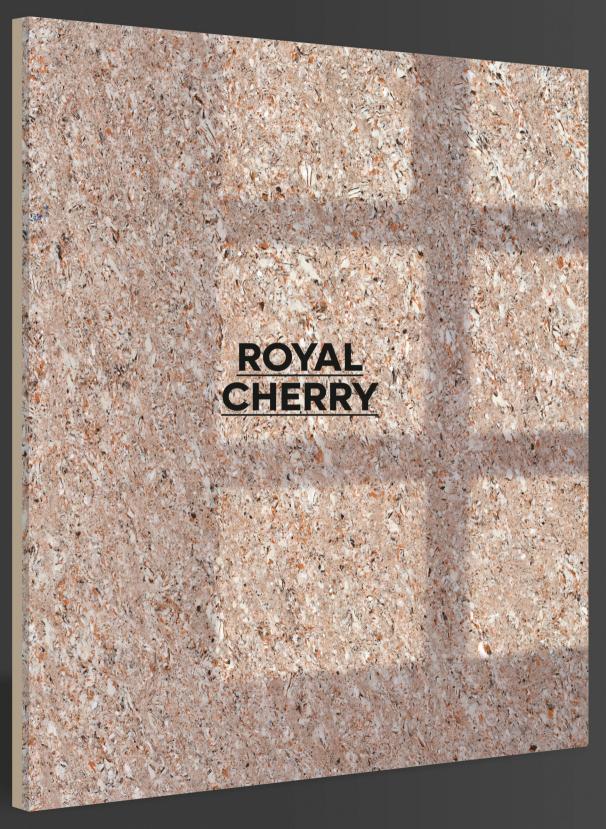

Thickness 8mm

















WATERPROOF SURFACE


















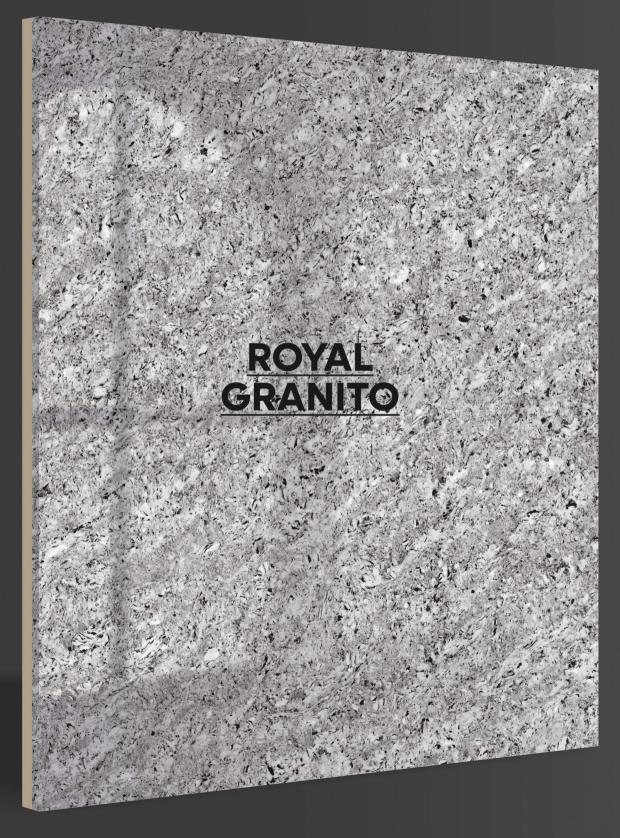

Thickness 8mm <u>Finish</u> **Polished**











FROST RESISTANCE TO FIRE

CE

WATERPROOF SURFACE







FLEXURAL STRENGTH

CHEMICAL RESISTANCE











Thickness 8mm





1



FROST RESISTANCE

RESISTANCE TO FIRE WATERPROOF SURFACE

ISTANCE TO FIRE





FLEXURAL STRENGTH


CHEM

WEIGHT







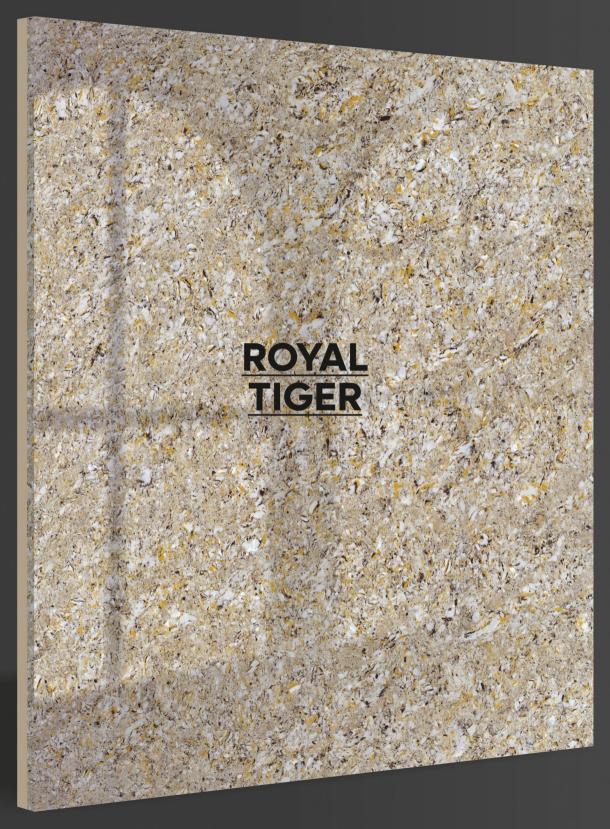

Thickness 8mm <u>Finish</u> **Polished**









RESISTANCE TO FIRE

WATERPROOF SURFACE



FROST RESISTANCE













PLAIN WHITE

<u>Size</u> **600x600mm** Thickness 8mm











FROST R RESISTANCE TO

RESISTANCE TO FIRE




(E) FLEXURAL STRENGTH










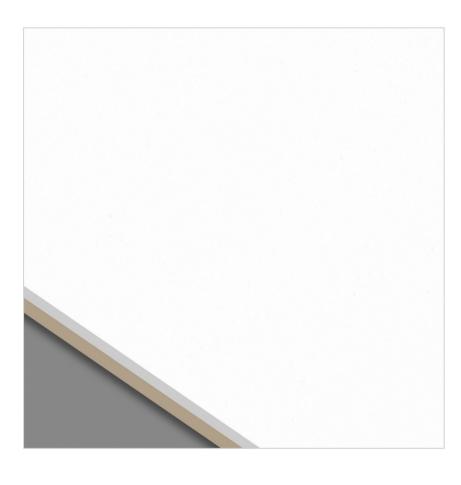





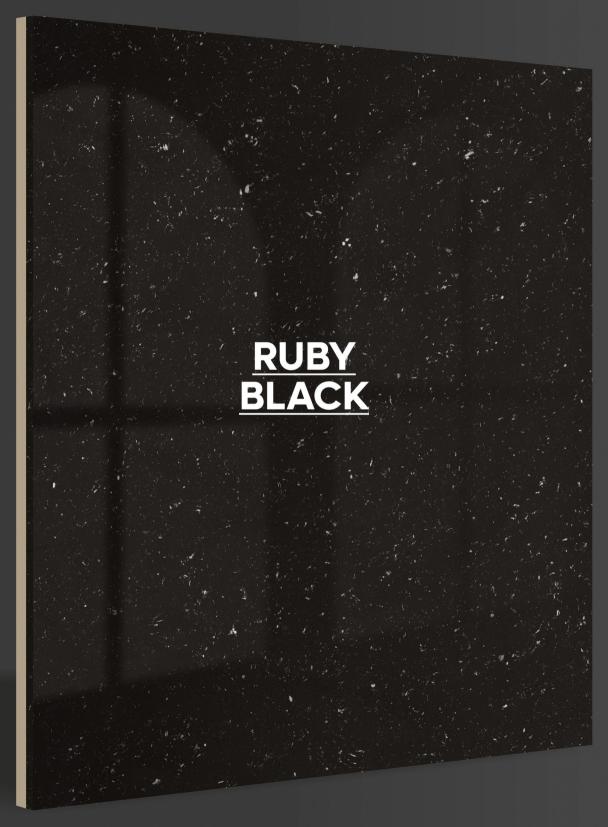

Thickness 8mm













FROST RESISTANCE RESISTANCE TO FIRE







FLEXURAL STRENGTH














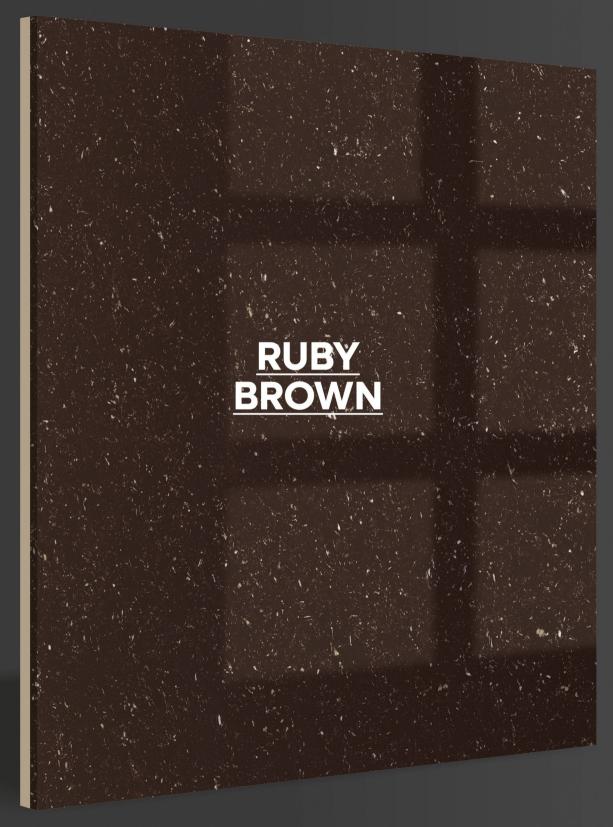

Thickness 8mm <u>Finish</u> **Polished**

















WATERPROOF SURFACE

















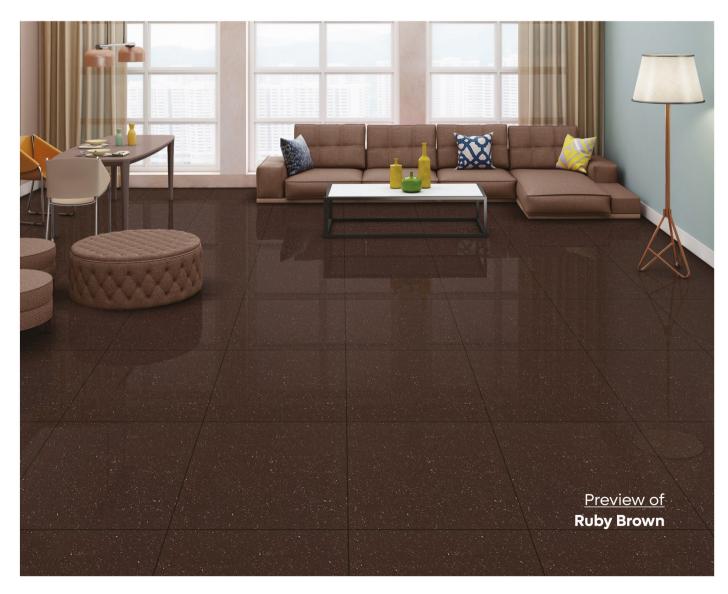



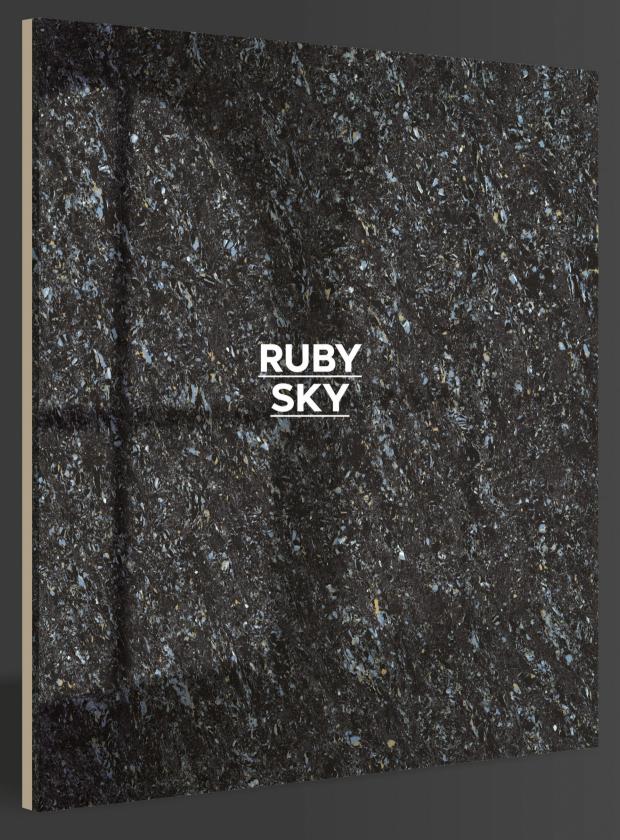

Thickness 8mm













FROST RESISTANCE TO FIRE



WATERPROOF SURFACE








CHEMICAL RESISTANCE



LIGHT

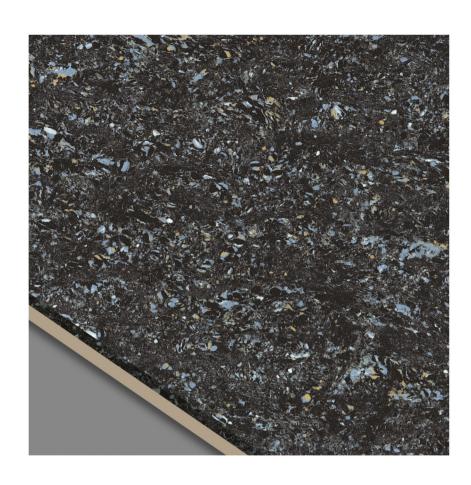



Technical Specification —

Sr. No.	PROPERTY	International Std. ISO 13006/EN 176 Group Bla	SUNGLARE Value	Method of Testing
1.	Deviation in Length	±0.6%	±0.1%	EN 98
2.	Deviation in Thickness	±0.5%	±0.1%	EN 98
3.	Straightness of Sides	±0.5%	±0.1%	EN 98
4.	Rectangularity	±0.6%	±0.2%	EN 98
5.	Surface Flatness	±0.5%	±0.2%	EN 98
6.	Water absorption *	<0.5%	<0.03%	EN 99
7.	Mohs hardness *	> 6	>8	EN 101
8.	Flexural Straightness *	> 27 N/mm²	> 47 N/mm²	EN 100
9.	Abrasion resistance	< 204 mm ³	< 144 mm ³	EN 102
10.	Skid Resistance (Friction Coefficient)	> 0.4	> 0.6	ASTM C-1028
11.	Breaking Strength *	1113 N	2830 N	ASTM C-648
12.	Density (g/cc)	> 2	2.4	DIN 51082
13.	Frost resistance	Frost proof	Frost proof	EN 202
14.	Chemical Resistance	No damage	No damage	EN 106
15.	Thermal Shock Resistance	No damage	No damage	EN 104
16.	Colour Resistance	No damage	No damage	DIN 51094
17.	Thermal Expansion	< 9 x 10-6	< 6 x 10-6	EN 103
18.	Stain Resistance	Resistant	Resistant	ISO 10545-14
19.	Moisture Expansion	Nil	Nil	ISO 10545-10
20.	Glossiness	_	Min. 65% reflection	Glossmeter

Packing Details —

Size	Normal Thickness	No. of Tiles/Box	Coverage Area	Wt. of Box
600x600 mm	9 mm	4 pcs.	1.44 sq. mt.	24.50 Kgs. (approx)

DISCLAIMER: We reserves the right to delete & amend either totally of partially, any of the colours, shapes, sizes, references and other technical specifications contained in this catalogue at any time. The colours shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of colours, sizes, references should be verified for Typographical errors. SHADE & SIZE VARIATIONS are inherent characteristics of ceramics. NO COMPLIANT SHALL BE ENTERTAINED ON TILES ALREADY LAID/FIXED.



SUNGLARE VITRIFIED PVT. LTD.

Survey No. 130, 8-A National Highway, Sartanpar Road, Near Senso Crossing, At. Sartanpar, Tal. Wankaner, Dist. Morbi, Gujarat, INDIA.

Cell: +91 99798 44100 E-mail: info@sunglare.in, marketing@sunglare.in

App Available on...



